



Item No. _____

359

Thick Shake Freezer

Features

Serve a wide variety of frozen desserts, like thick shakes and smoothies, with the assurance of safe temperatures for dairy products. Direct-draw two flavors, or blend in flavorings for more variety.

Freezing Cylinder

Two, 7 quart (6.6 liter).

Refrigerated Mix Hopper

Two, 20 quart (18.9 liter). Refrigerated to maintain mix temperature below 41°F (5°C).

Indicator Lights

If the freezer is out of mix, the Mix Out light will illuminate, and the freezer will shut down automatically to prevent damage. Less than one pint (0.5 liter) is left in the hopper when the Mix Out system is activated.

Solid-State Controls

Thermistor control precisely monitors temperature and maintains consistent quality in product texture through solid-state technology.

Thumb-Grip Draw Handle


Draw handle makes dispensing of product easy by squeezing two levers together.

Fast Ejection

The beater design ejects product quickly to serve customers faster. Dispense a 16 fl. oz. (473 ml) serving in approximately 3 seconds.

Plastic Hopper Cover

The durable plastic hopper cover maintains its shape through years of use.

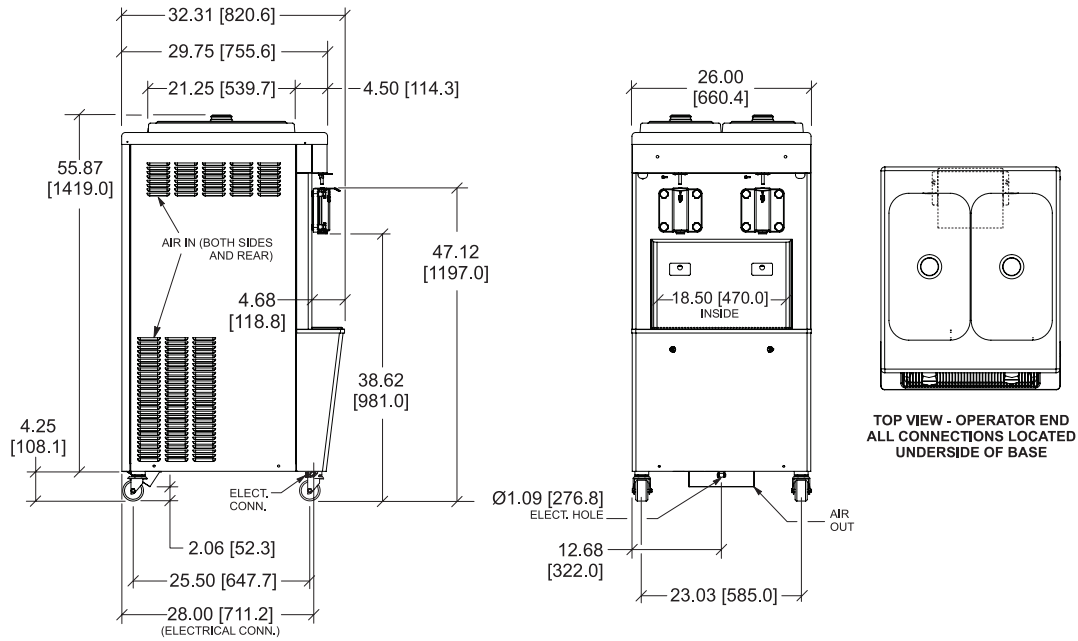

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lb.	kg
Net	580	263.1
Crated	673	305.3

*For reference only

	cu. ft.	cu. m
Volume	44.3	1.26

Dimensions	in.	mm
Width	26	660
Depth	32-3/8	822
Height	55-7/8	1418
Floor Clearance	4-1/4	108

*Mounted on standard casters

Electrical	Maximum	Minimum	Poles (P)
	Fuse Size	Circuit Ampacity	
208-230/60/3 Air	30	25	3P 4W
380-415/50/3N~ Air	15	16	4P 5W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information, approval marks, and refrigerant always refer to the data label of the unit.)

Continuing research results in steady improvements. Therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No Cooling: Air Water NA

Options:

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

Specifications

Electrical

One dedicated electrical connection is required. See the electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord and receptacle specifications as local codes allow.

Beater Motors

Two, 1.5 hp.

Refrigeration System

Two, approximately 9,200 BTU/hr. R449A.
 BTUs may vary depending on compressor used.)

Air-Cooled

Minimum Clearance: 3" (76 mm) around all sides. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Options

- Bumper Kit



750 N. Blackhawk Blvd.
 Rockton, Illinois 61072
www.taylor-company.com