



Optional Cart with Front Opening Door

Item No. \_\_\_\_\_

# C152

## Soft Serve Freezer

Single Flavor

R290 Refrigerant

### Features

Offer all the popular soft serve variations, from low or non-fat ice creams to custards, yogurt, and sorbet.

### Freezing Cylinder

One, 1.5 quart (1.4 liter).

### Mix Hopper

One, 8 quart (7.6 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

### Indicator Lights

The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low.

### Electronic Controls


Softech™ is our exclusive microprocessor-based master control that regulates refrigeration by measuring product viscosity to maintain consistent quality.

### Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

### Door Interlock System

Protects the operator from injury as the beater will not operate without the dispensing door in place.

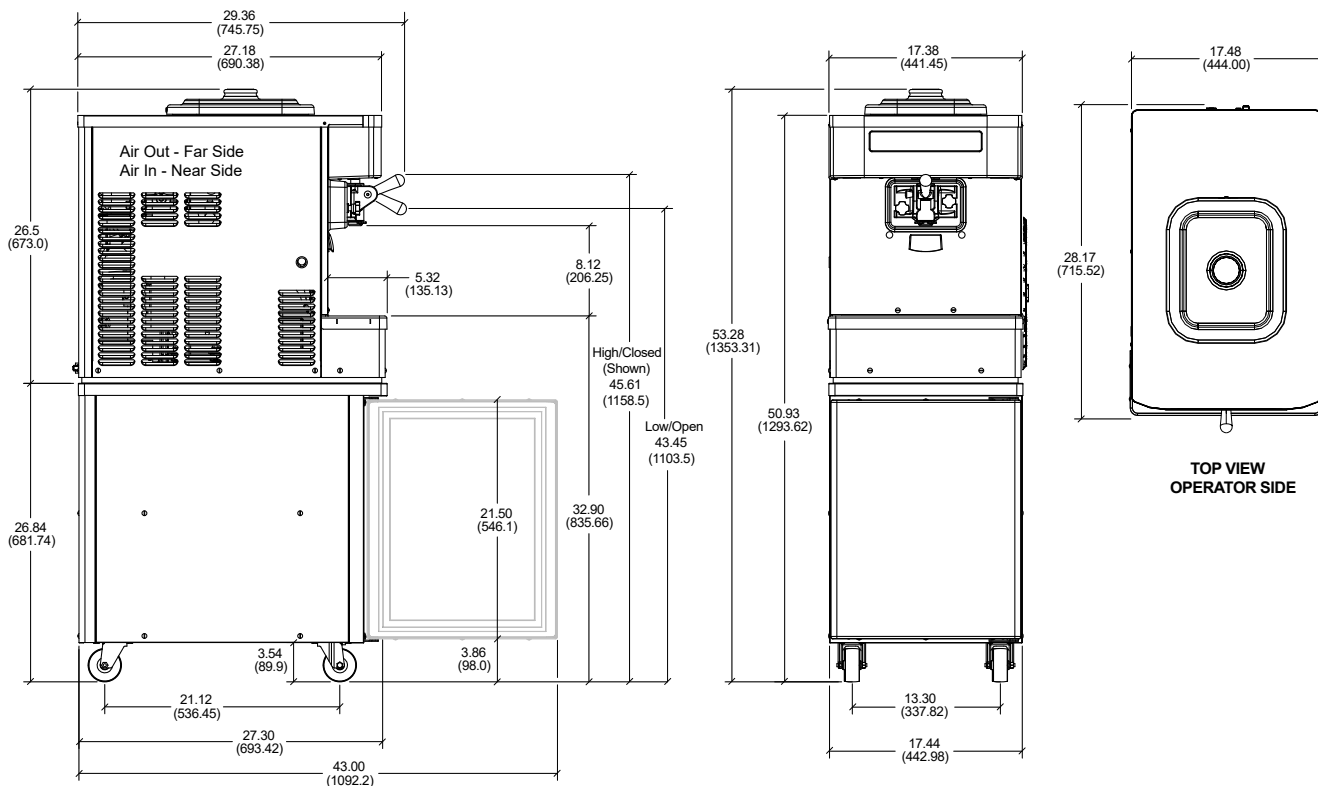

FIGURES IN BRACKETS INDICATE MILLIMETERS EQUIVALENT TO DECIMAL DIMENSIONS (PLUS OR MINUS 1/16 INCH [1.5MM]).

<b>Weights</b>	<b>lbs.</b>	<b>kgs.</b>
Net	203	92.1
Crated	245	111.1
<i>*For reference only</i>		
	<b>cu. ft.</b>	<b>cu. m.</b>
Volume	21.1	0.60
<b>Dimensions</b>	<b>in.</b>	<b>mm.</b>
Width	17-31/64	444.0
Depth	29-23/64	745.75
Height	26-1/2	673.0
<i>*Mounted on standard casters</i>		
<b>Electrical</b>	<b>Total Amps</b>	<b>Supplied with NEMACord</b>
220-240/50/1 Air	5.0	----

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements. **(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)**

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

## Bidding Specs

**Electrical:** Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
**Neutral:** ☐ Yes ☐ No **Cooling:** ☐ Air ☐ Water ☐ NA

**Options:**

## Specifications

## Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord-connected. Consult the international Taylor distributor for cord and receptacle specifications for 50 Hz equipment.

### Beater Motor

One, 0.5 HP.

## Refrigeration System

Main system 2,600 BTU/Hr using R290. Separate Hopper Refrigeration (SHR) 400 BTU/Hr R290. (BTUs may vary based on application.)

## Air-Cooled

Minimum 4" (102 mm) on both sides. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

## Options

- 4" Legs (must install skirt on right side of unit to prevent recirculation of warm air).
- C208 Cart Standard Height with Casters.

**All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.**

**Authorized Taylor Distributor**



750 N. Blackhawk Blvd.  
Rockton, Illinois 61072  
**[www.taylor-company.com](http://www.taylor-company.com)**

026195JADV

10/25